


12888ST SWEEP MOVEMENT

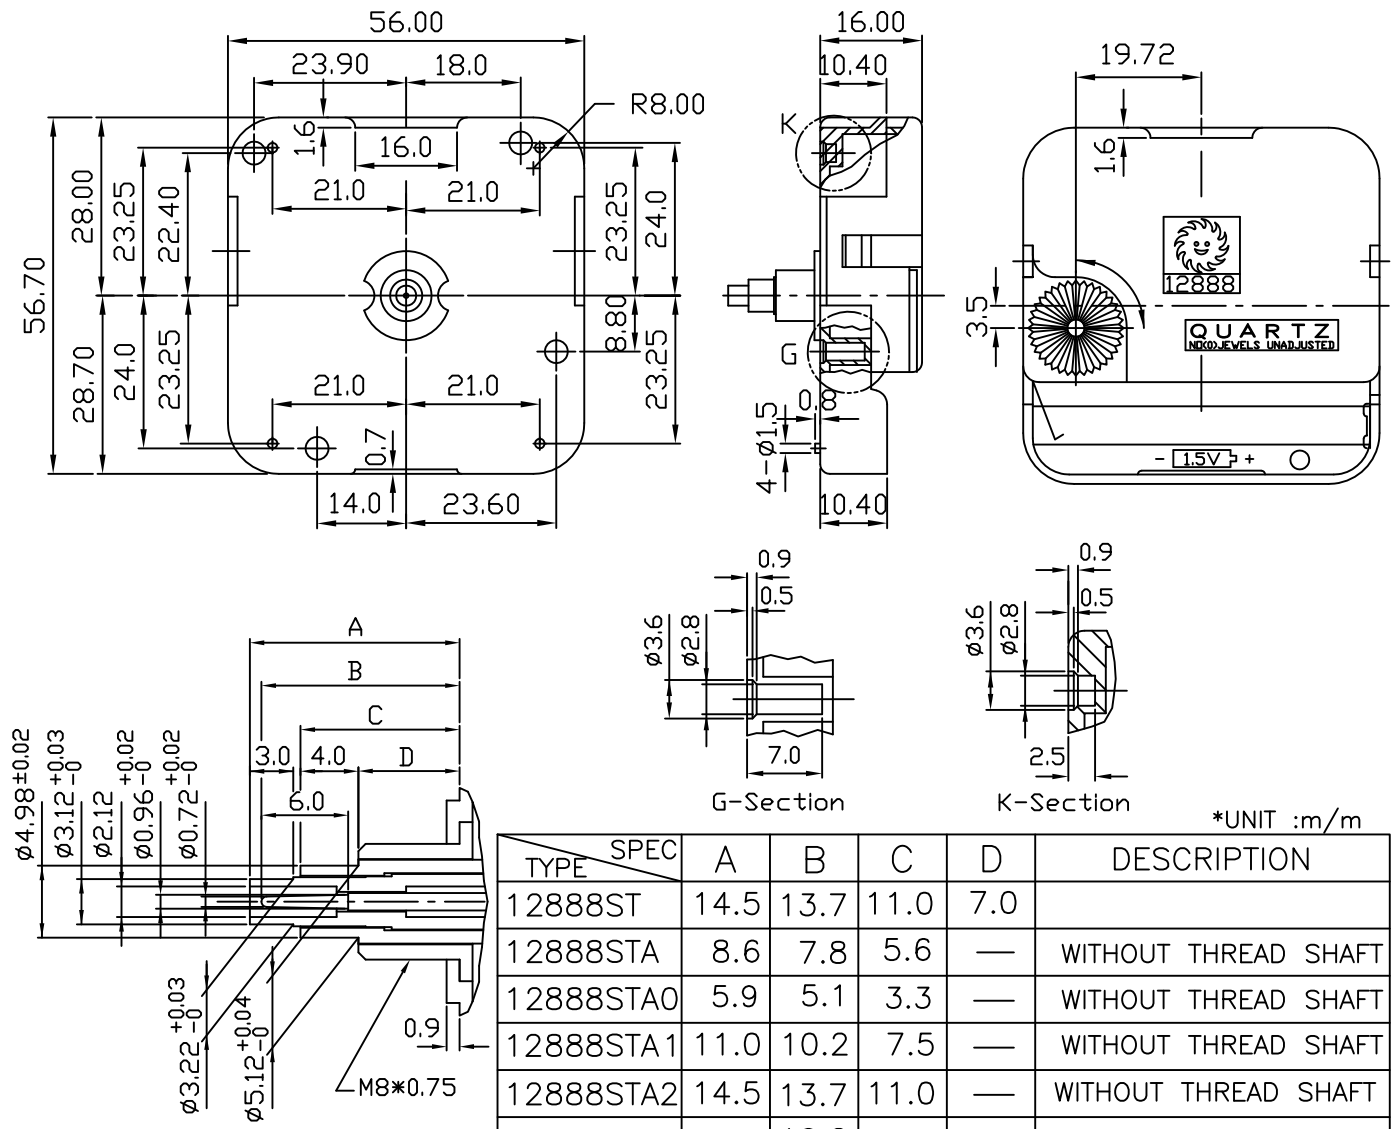

*UNIT :m/m

| TYPE | SPEC | A | B | C | D | DESCRIPTION |
|-----------|------|------|------|------|------|----------------------|
| 12888ST | | 14.5 | 13.7 | 11.0 | 7.0 | |
| 12888STA | | 8.6 | 7.8 | 5.6 | — | WITHOUT THREAD SHAFT |
| 12888STA0 | | 5.9 | 5.1 | 3.3 | — | WITHOUT THREAD SHAFT |
| 12888STA1 | | 11.0 | 10.2 | 7.5 | — | WITHOUT THREAD SHAFT |
| 12888STA2 | | 14.5 | 13.7 | 11.0 | — | WITHOUT THREAD SHAFT |
| 12888STB | | 11.0 | 10.2 | 7.5 | 3.5 | SHORTER THREAD SHAFT |
| 12888STB1 | | 8.6 | 7.8 | 5.6 | 3.5 | SHORTER THREAD SHAFT |
| 12888STB2 | | 12.4 | 11.9 | 9.6 | 5.5 | SHORTER THREAD SHAFT |
| 12888STC | | 23.5 | 22.7 | 20.0 | 16.0 | LONGER THREAD SHAFT |
| 12888STC1 | | 17.0 | 16.2 | 13.5 | 9.5 | LONGER THREAD SHAFT |
| 12888STC5 | | 20.0 | 19.1 | 16.5 | 12.0 | LONGER THREAD SHAFT |

SPECIFICATIONS

| | | | | |
|-----------------------------|--------------------------------------------|-----------------|-----------------|--------|
| Operation Voltage | : 1.3V~1.7V | Hands Allowance | Second | Minute |
| Time Keeping Accuracy | : ±20Sec/Month At 1.5V DC.25°C | Length: | under 130mm | 160mm |
| Current Consumption | : Less Than 150 µA At 1.5V DC. | Weight: : | under 2g | 6g |
| Torque At Second Hand | : ≤0.6gf-cm(1.5V) | Unbalance: | under 0.15gf-cm | 6gf-cm |
| Torque At Minute Hand | : ≤36gf-cm(1.5V) | | | |
| Operating Temperature Range | : -10°C~60°C | | | |
| Battery Life | : Approx.One Year(UM-3) | | | |
| Time Indication | : 12Hour Idication By 3Hands (Analogue) | | | |