


Round Movements

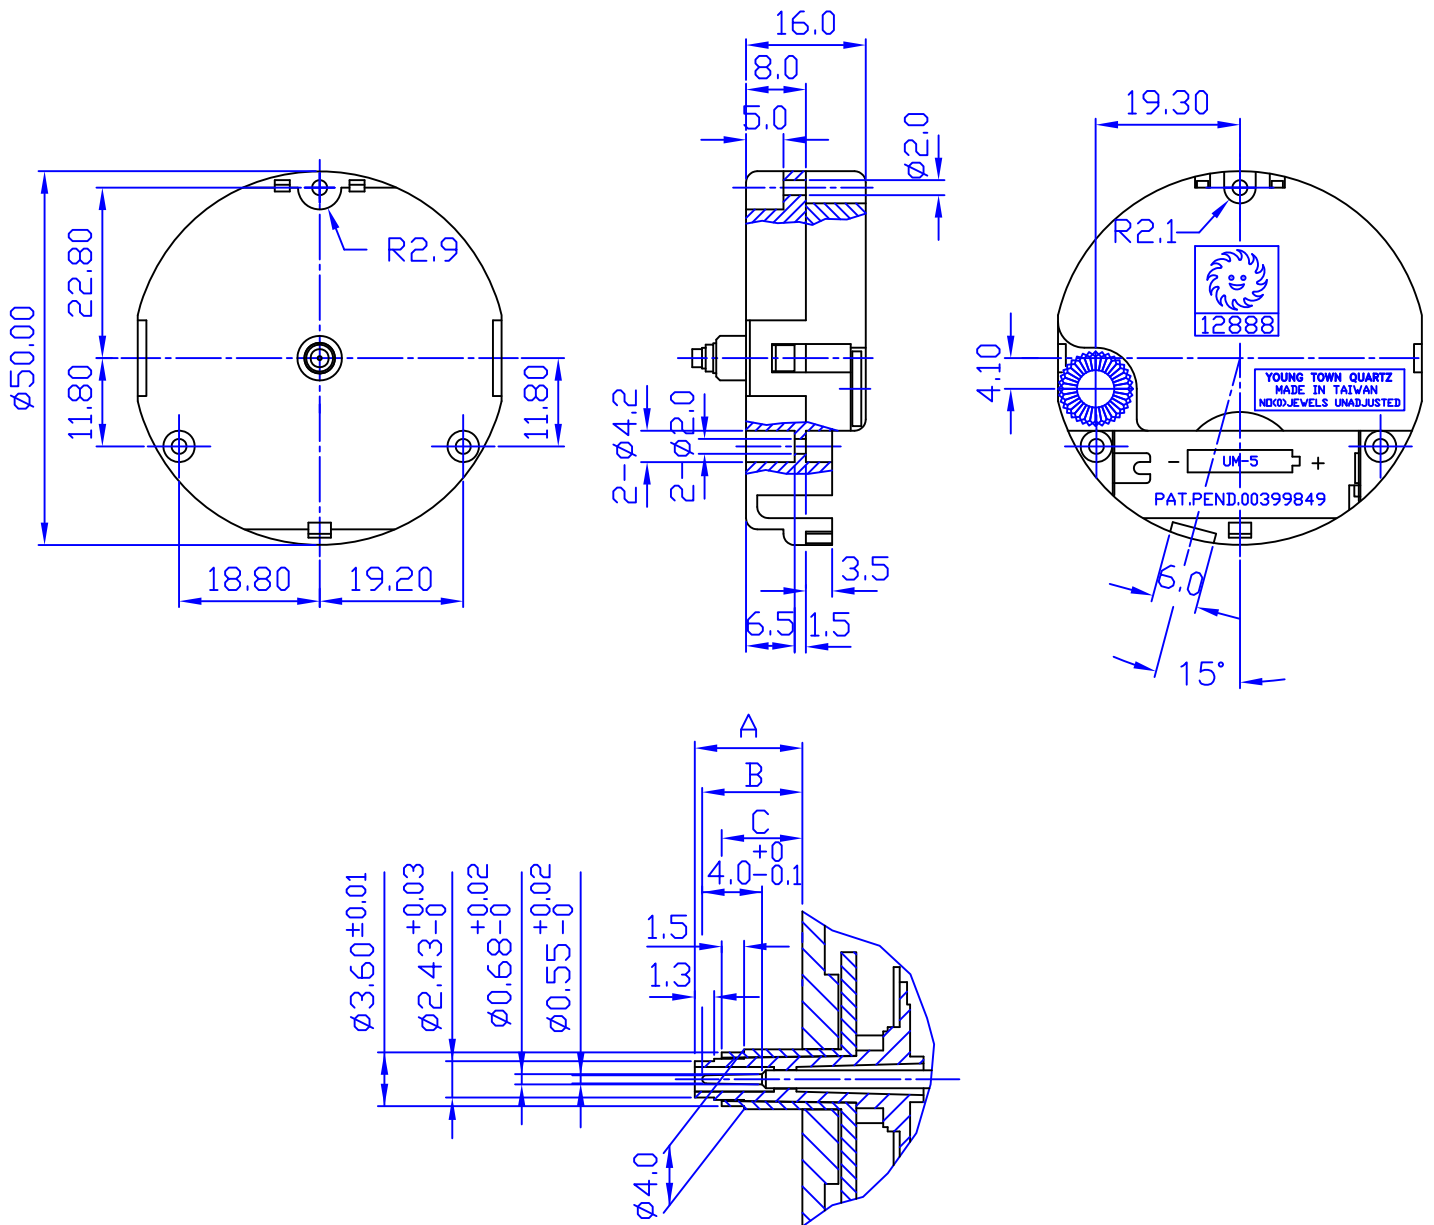

*UNIT :m/m

TYPE \ SPEC	A	B	C	D	DESCRIPTION
12888V1	7.2	6.9	5.4	—	WITHOUT THREAD SHAFT,BATTERY UM-5
12888V3	4.7	4.4	2.9	—	WITHOUT THREAD SHAFT,BATTERY UM-5

SPECIFICATIONS

OPERATING VOLTAGE	1.3V ~ 1.7V
TIME KEEPING ACCURACY	±30SEC/MONTH AT 1.5V DC. 25°C (UNADJUSTED)
CURRENT CONSUMPTION	LESS THAN 120µA AT 1.5V DC.
TORQUE AT SECOND HAND	0.6 (GF-CM)
TORQUE AT MINUTE HAND	LESS THAN 36 (GF-CM)
OPERATING TEMPERATURE RANGE	-10°C ~ 60°C