
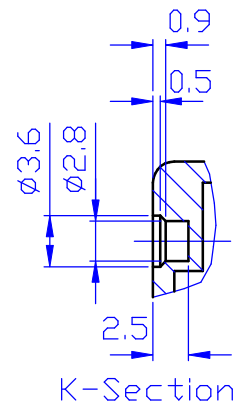
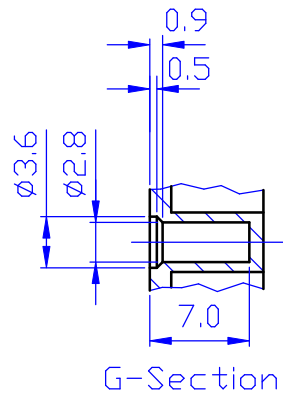
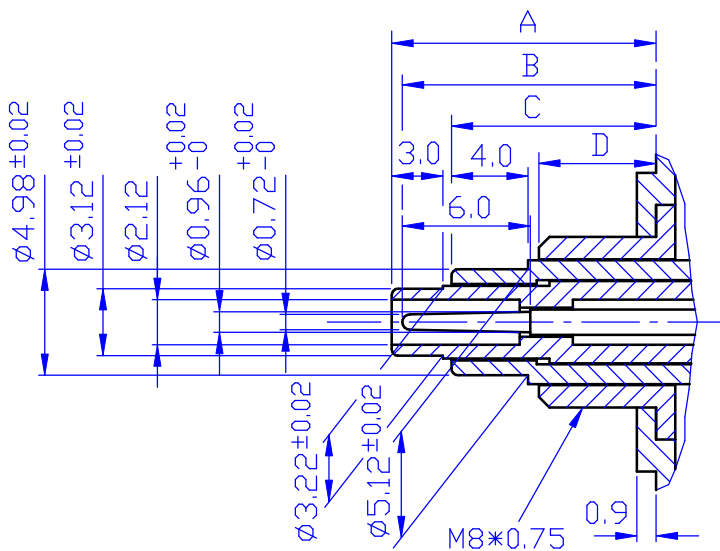


12888SH 24-HOURS MOVEMENTS

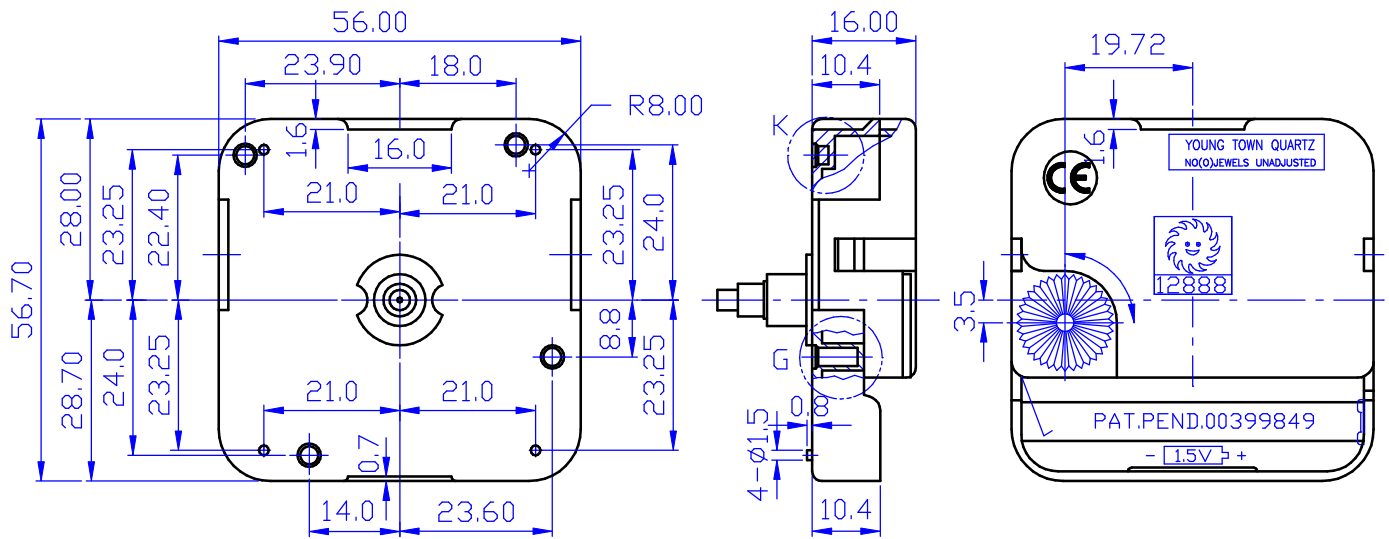

*UNIT:m/m

TYPE \ NO.	A	B	C	D	DESCRIPTION
12888SH	14.5	13.7	11.0	7.0	BATTERY : UM-3
12888SHB2	12.4	11.9	9.6	5.5	SHORTER THREAD SHAFT
12888SHA	8.6	7.8	5.6	—	WITHOUT THREAD SHAFT
12888SHE	14.5	13.7	11.0	7.0	TRIGGER MOVEMENT

SPECIFICATIONS

OPERATING VOLTAGE	1.3V ~ 1.7V
TIME KEEPING ACCURACY	±30SEC/MONTH AT 1.5V DC, 25°C (UNADJUSTED)
CURRENT CONSUMPTION	LESS THAN 150µA AT 1.5V DC.
TORQUE AT SECOND HAND	0.6 (GF-CM)
TORQUE AT MINUTE HAND	LESS THAN 36 (GF-CM)
OPERATING TEMPERATURE RANGE	-10°C ~ 60°C
TIME INDICATION	24-HOUR INDICATION BY 3 HAND(ANALOGUE)