


# ONE-CYCLE TIDE MOVEMENT

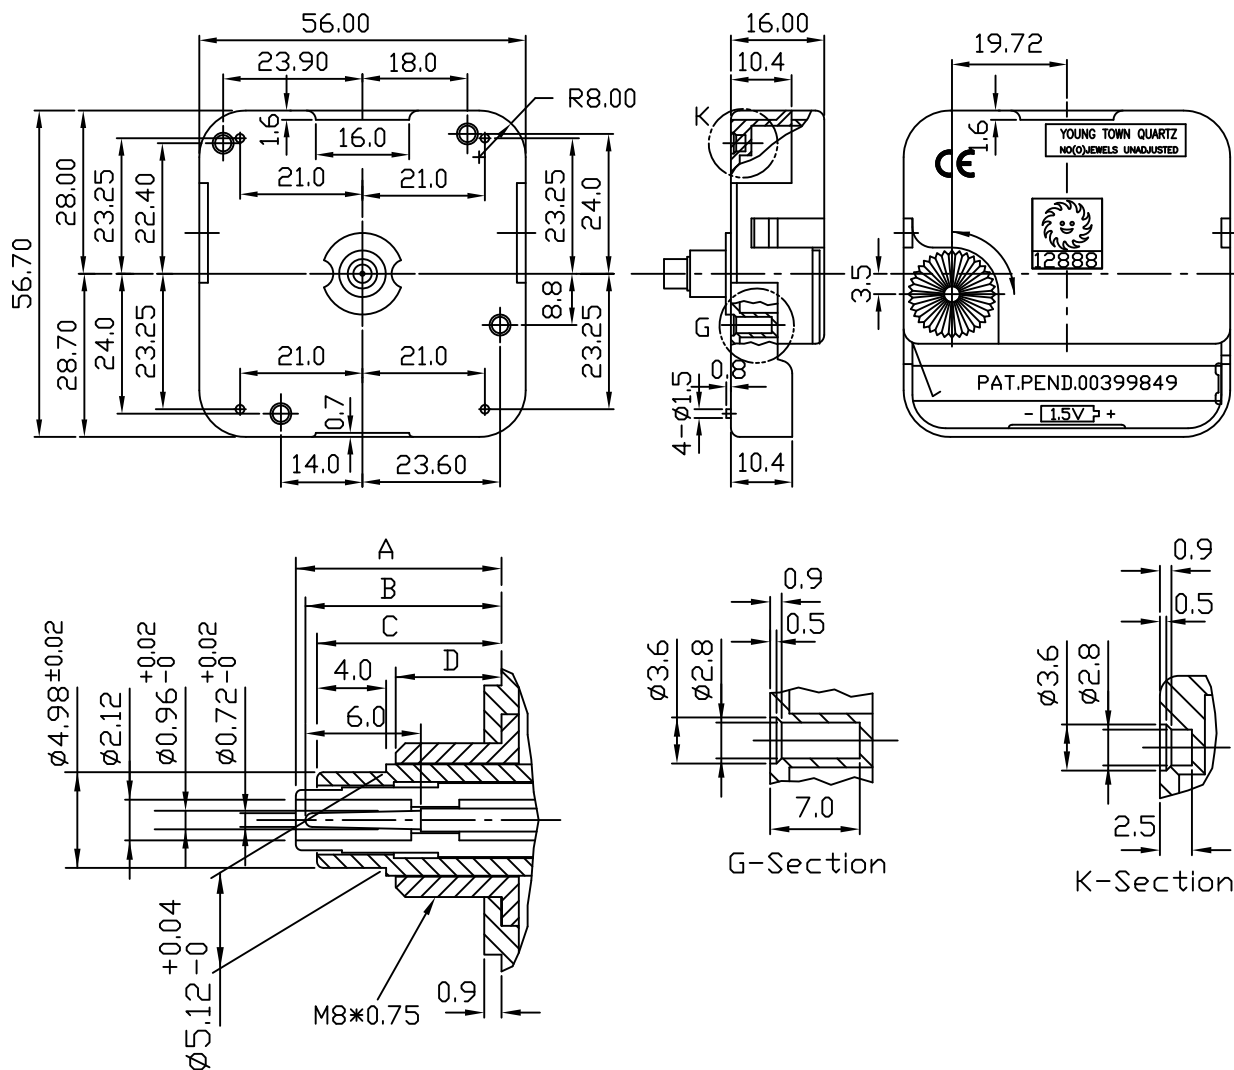

\*UNIT:m/m

SPEC TYPE	A	B	C	D	DESCRIPTION
			TIDE	SCREW	
128FB1	11.0	10.2	11.0	7.0	ONE-CYCLE TIDE MOVEMENT
128FB1B	8.6	7.8	7.5	3.5	SHORTER THREAD SHAFT
128FB1C1	14.5	13.7	13.5	9.5	LONGER THREAD SHAFT

C--TIDE(12Hours & 24Minutes)

## SPECIFICATIONS

OPERATING VOLTAGE	1.3V~ 1.7V
TIME KEEPING ACCURACY	±30SEC/MONTH AT 1.5V DC, 25°C (UNADJUSTED)
CURRENT CONSUMPTION	LESS THAN 150µA AT 1.5V DC.
OPERATING TEMPERATURE RANGE	-10°C ~ 60°C