
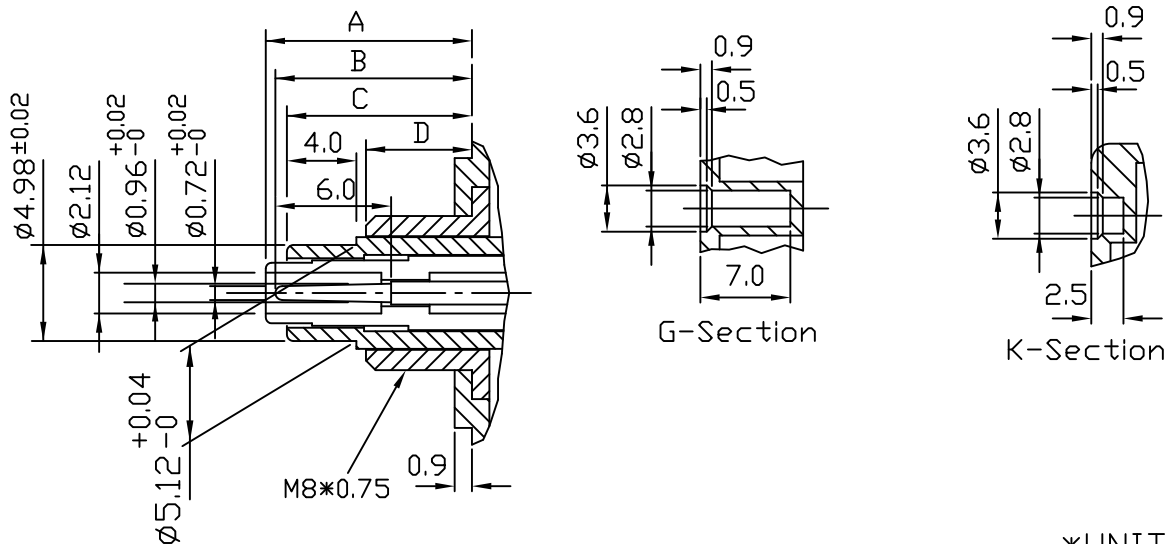


TWO-CYCLE TIDE MOVEMENT

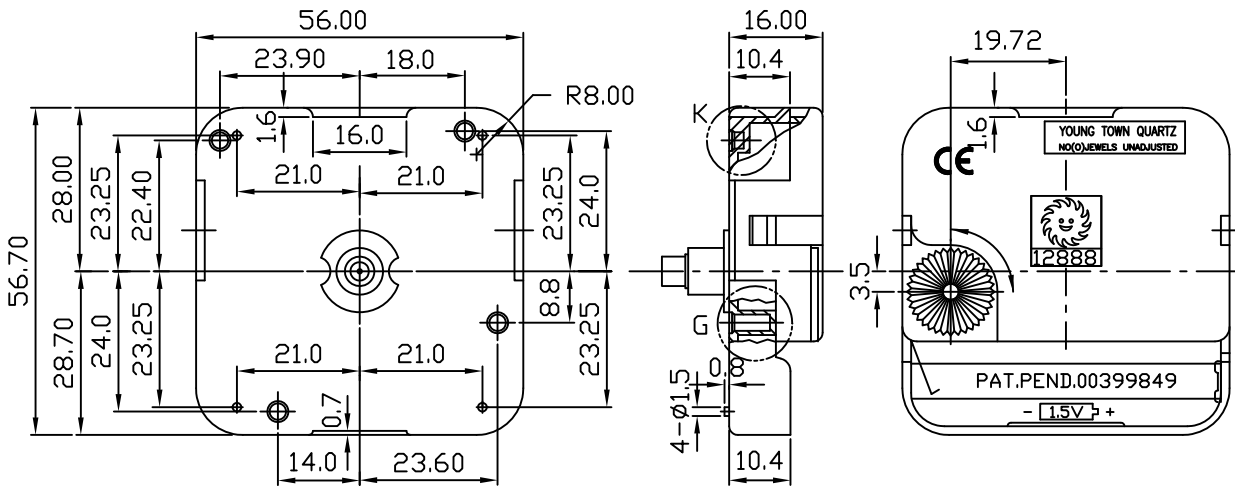

*UNIT:m/m

SPEC TYPE	A	B	C	D	DESCRIPTION
			TIDE	SCREW	
128FB1H	11.0	10.2	11.0	7.0	TWO-CYCLE TIDE MOVEMENT
128FB1HB	8.6	7.8	7.5	3.5	SHORTER THREAD SHAFT
128FB1HC1	14.5	13.7	13.5	9.5	LONGER THREAD SHAFT

C--TIDE(24Hours & 48Minutes)

SPECIFICATIONS

OPERATING VOLTAGE	1.3V ~ 1.7V
TIME KEEPING ACCURACY	±30SEC/MONTH AT 1.5V DC, 25°C (UNADJUSTED)
CURRENT CONSUMPTION	LESS THAN 150μA AT 1.5V DC.
OPERATING TEMPERATURE RANGE	-10°C ~ 60°C