



C2-B Half-Separated Perpetual Calendar Clock Module

Time&Control Module

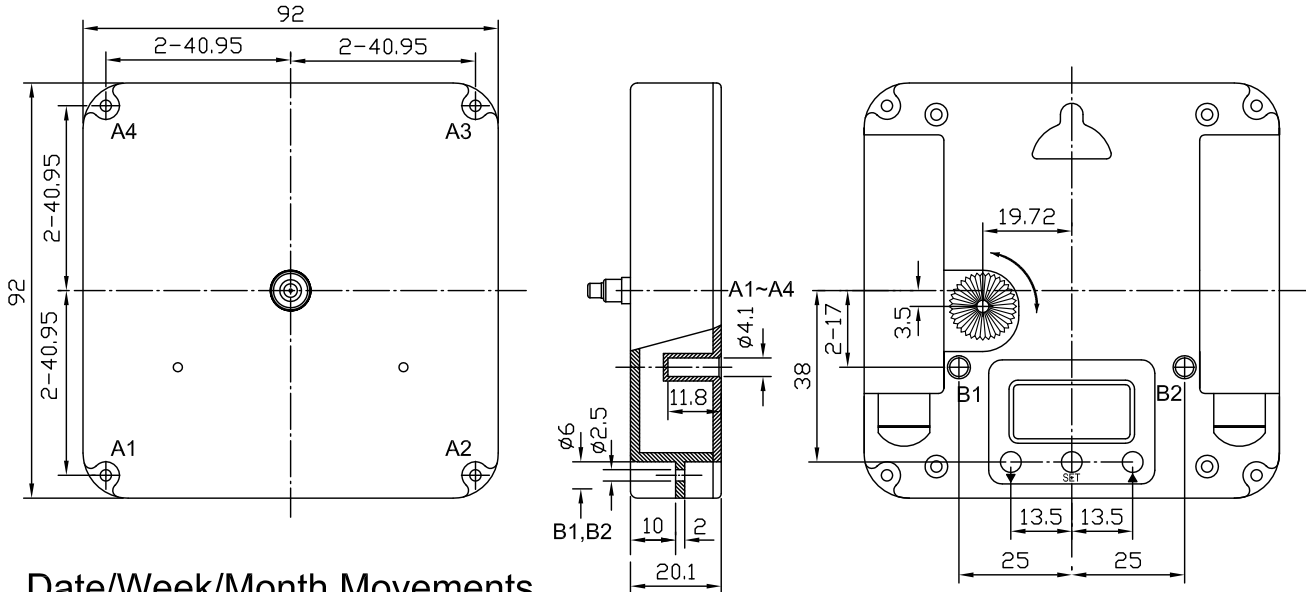

Date/Week/Month Movements

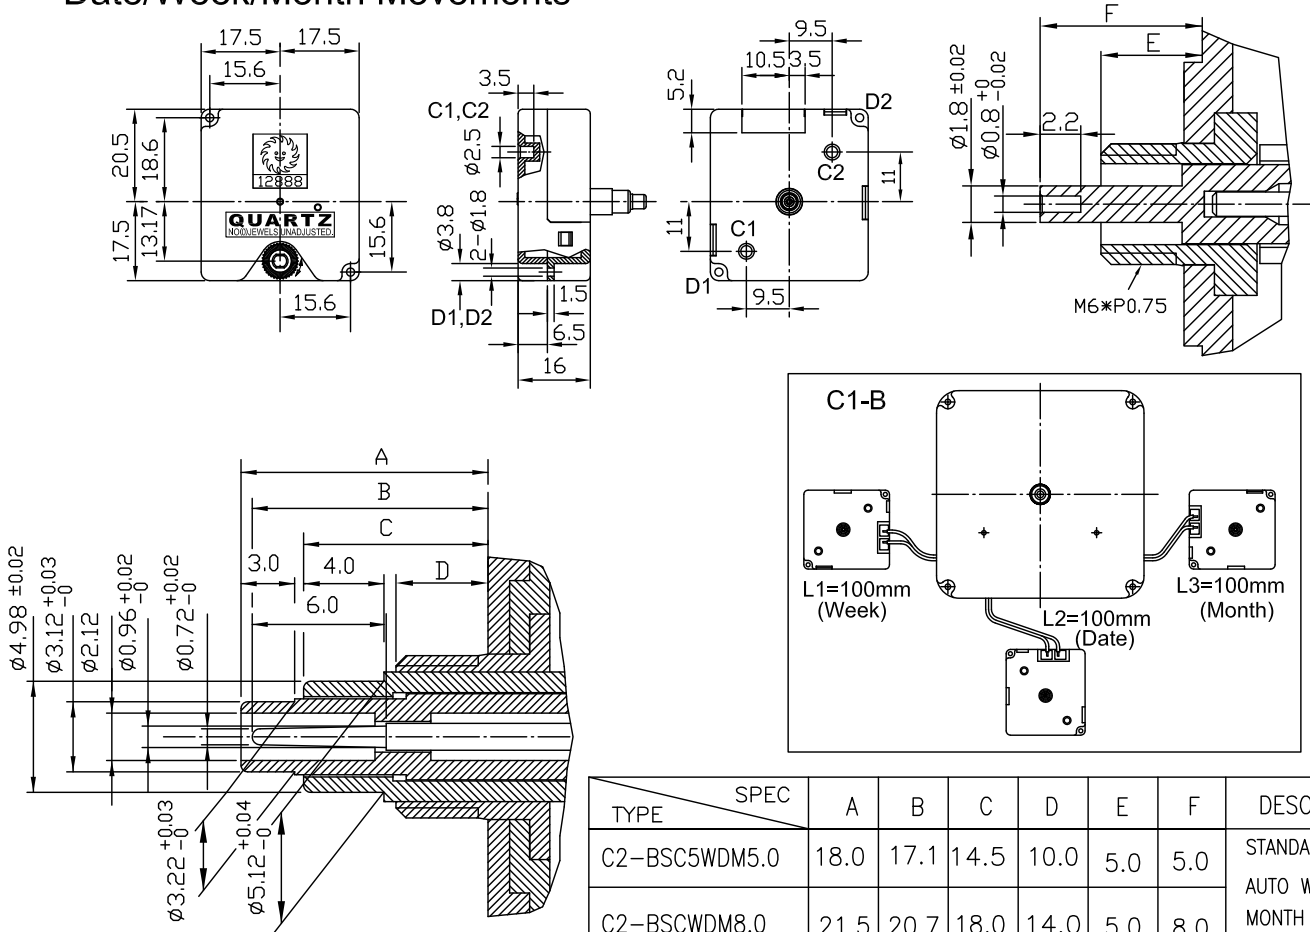

*UNIT:m/m

SPECIFICATIONS

OPERATING VOLTAGE
 TIME KEEPING ACCURACY
 CURRENT CONSUMPTION
 TORQUE AT SECOND HAND
 TORQUE AT MINUTE HAND
 OPERATING TEMPERATURE RANGE
 BATTERY LIFE

2.5V~3.2V
 ±30SEC/MONTH AT 1.5V DC.
 LESS THAN 150µA AT 1.5V DC. 25°C (UNADJUSTED)(TIME)
 LESS THAN 0.6 (GF-CM) (STANDARD MOVEMENT)
 LESS THAN 0.6 (GF-CM) (SWEEP MOVEMENT)
 LESS THAN 36 (GF-CM)
 -10°C~ 60°C
 ABOUT 1 YEAR (UM-3 x 2)

| TYPE | SPEC | A | B | C | D | E | F | DESCRIPTION |
|---------------|------|------|------|------|------|-----|-----|-----------------------------------|
| C2-BSC5WDM5.0 | | 18.0 | 17.1 | 14.5 | 10.0 | 5.0 | 5.0 | STANDARD MOVEMENT |
| C2-BSCWDM8.0 | | 21.5 | 20.7 | 18.0 | 14.0 | 5.0 | 8.0 | AUTO WEEK,DATE, MONTH MOVEMENT |
| C2-BTC5WDM5.0 | | 18.0 | 17.1 | 14.5 | 10.0 | 5.0 | 5.0 | SWEEP MOVEMENT |
| C2-BTCWDM8.0 | | 21.5 | 20.7 | 18.0 | 14.0 | 5.0 | 8.0 | AUTO WEEK,DATE, MONTH MOVEMENT |